



SPECIFICATION

Product Name: DALI 2 Dimmable LED driver

Model No.: KL50CC-PDii

Issue Date: March 06, 2023

CUSTOMER APPROVED

Version	Product Name / Product Model	Reason / content for change	Stage	Date
A0	KL50CC-PDii LED driver		Design verification	2023-03-06

Specification for DALI 2 Dimmable LED Driver KL50CC-PDii C.C.



- Flicker-free for whole dimming range
- Stand-by power below 0.5W
- Primary dimming with push button
- Built-in DALI interface DT8
- Centrally-supplied DC emergency operation DT19
- Protection: short circuit / over temperature/ over voltage
- Derating current for over high ambient temperature
- Push dim with memory function
- 5 year warranty


1. Parameters

Input	Operating Voltage	198-264VAC 50Hz /60Hz					
	Rated Input Voltage	220-240VAC 50Hz /60Hz					
	DC Input Voltage range	200-240VDC					
	Input Current	0.25A Max.					
	Input Inrush Current	<15A (Half current pulse width 100US) @230VAC					
	Power Factor	≥0.95 @230VAC (Full load)					
	Total harmonic distortion	Typical: 13% (@230Vac, 100% load)					
	Stand-by Power	≤0.5W (@230Vac)					
	Efficiency	87%Max. @230VAC (Full load)					
	Wiring Method	Push terminal, wire cross section:0.75-1.5mm ²					
	Loop-in&Loop-out quantity	17PCS (@230Vac)					
	Automatic circuit breaker (Calculate current in the wire)	type	B10	B13	B16	B20	B25
Number		30	40	50	60	75	
type		C10	C13	C16	C20	C25	
Number		20	25	30	40	50	
Output	Operating mode	Constant Current					
	Load type	LED					
	Ripple requirement (Flickering or flickering-Free)	Flicker value: less than 2% for whole dimming range					
	Start up time	<0.7s (@230Vac)			<0.5s (@ DC Input)		
	No-load output voltage	70VDC Max.					
	Load output voltage range	12-53VDC					
	Full load output power	50W Max.					
	Load output current	700~1200mA : For details<Current gear setting>					

Output	Constant current/voltage Precision	Constant Current Precision $\pm 5\%$
	Wiring method	Push terminal, wire cross section: $0.75-1.5\text{mm}^2$
Control Method	Primary PUSH Dimming	Primary PUSH dimming (Max.lead length: 20M)
	1-10V Dimming	NO
	Dimming Range	Primary PUSH & DALI dimming: 0%-100%
	Potentiometer	NO
	DALI Dimming	DALI dimming (Max.lead length: 300M)
Exception Protection Requirements	Output over temperature protection	Yes, without self recovery function (Can be inquired)
	Output short circuit protection	Yes, without self recovery function (Can be inquired)
Operating Environment	Operating temperature/ humidity	$-25^{\circ}\text{C}\sim 50^{\circ}\text{C}$ Humidity:85% (Non-condensing)
	Storage temperature/ humidity	$-40^{\circ}\text{C}\sim 80^{\circ}\text{C}$, Humidity:10% - 95%
	Max. case temp (Tc)	85°C
Safety & EMC	EMC standard	EN55015 EN61547 EN61000-3-2 EN61000-3-3
	DALI protocol standard	IEC62386-101 / 102 / 207 DT6 / 209 DT8 / 220 DT19
	Safety standard	EN61347-1 EN61347-2-13
	Certification	CE
	Withstand voltage	3750Vac, 5mA, 60s (Input "L N"- Output "SEC")
Others	Degrees of protection	IP20
	Type of protection	Class II
	Built-in installation	120*64.8*24mm
	Independent installation	179.6*66.9*24mm
	Blackout memory function	Yes, PUSH blackout memory
	PUSH dimming synchronization	20 units Max.
	Packaging requirement	white box+ Instructions Clapboard Outer Carton (K=A)
	Weight	155g
	Life	5 year @Ta full load

Note: All parameters are tested at the input voltage of 230Vac and 25 degree environment unless specified.

2. Dimension (Unit: mm)

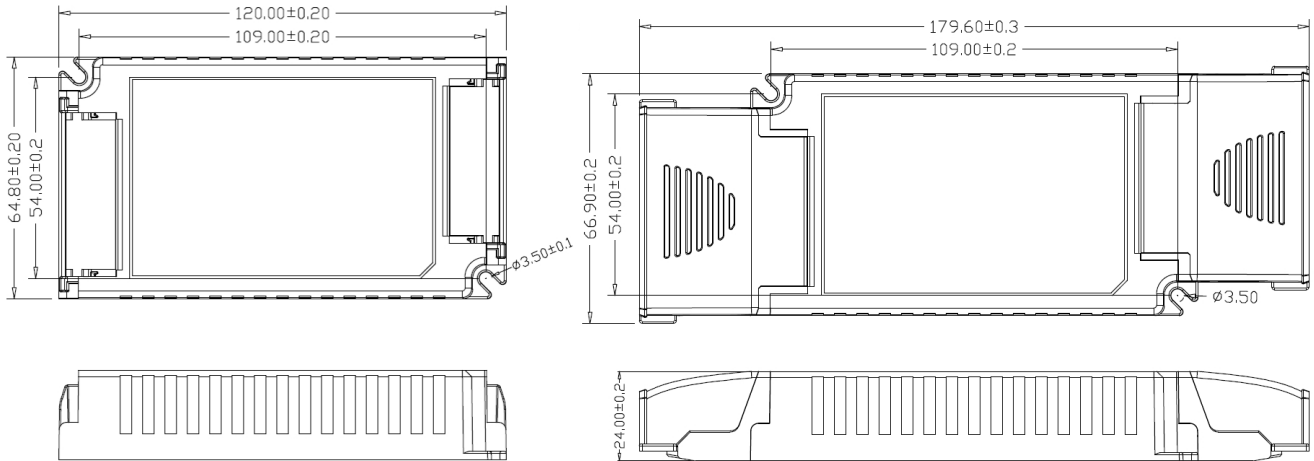

3. Wiring Diagram

Fig.A DALI Dimming



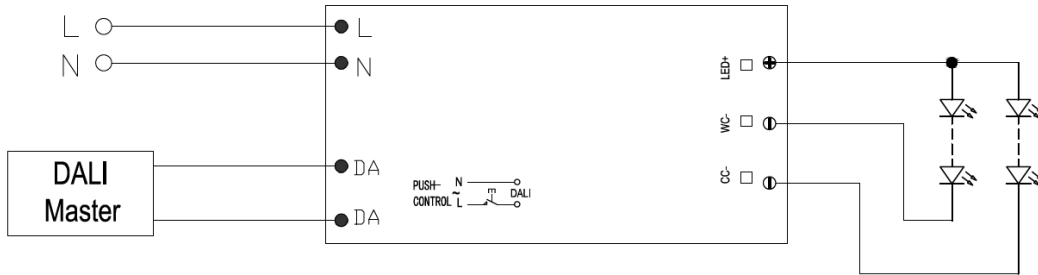


Fig. B Push Dimming

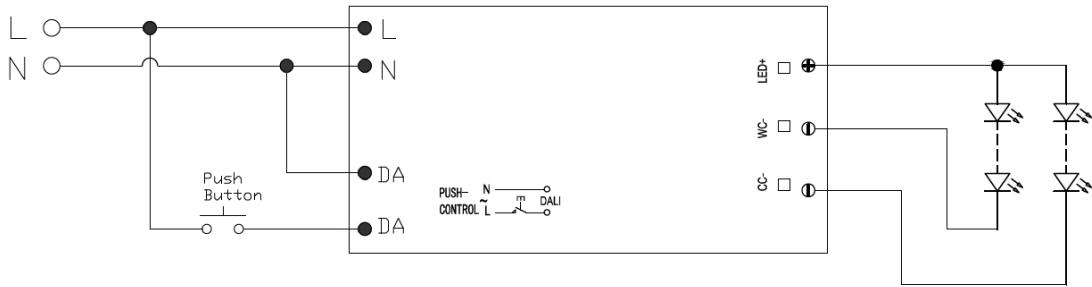

4. Derating

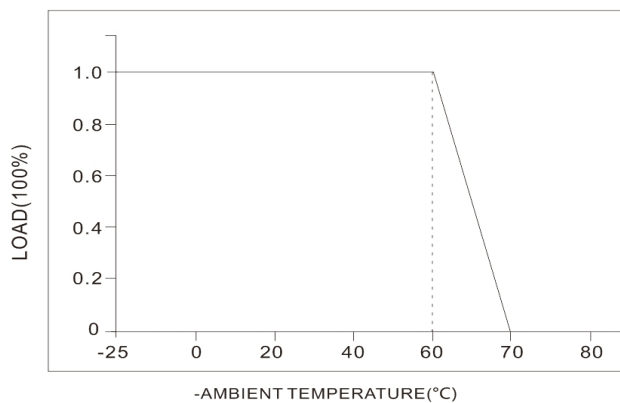

Shenzhen Merrytek Technology Co.,Ltd


Add: 2nd and 3rd floor, NO.3 Building, 380 Xiangshan Avenue, Luotian, Yanluo, Baoan, Shenzhen, 518127,China

Tel: +86 (0)755-2305 7253

Fax: +86 (0)755-2786 3012

Website: www.merrytek.com

5. Dimming curve

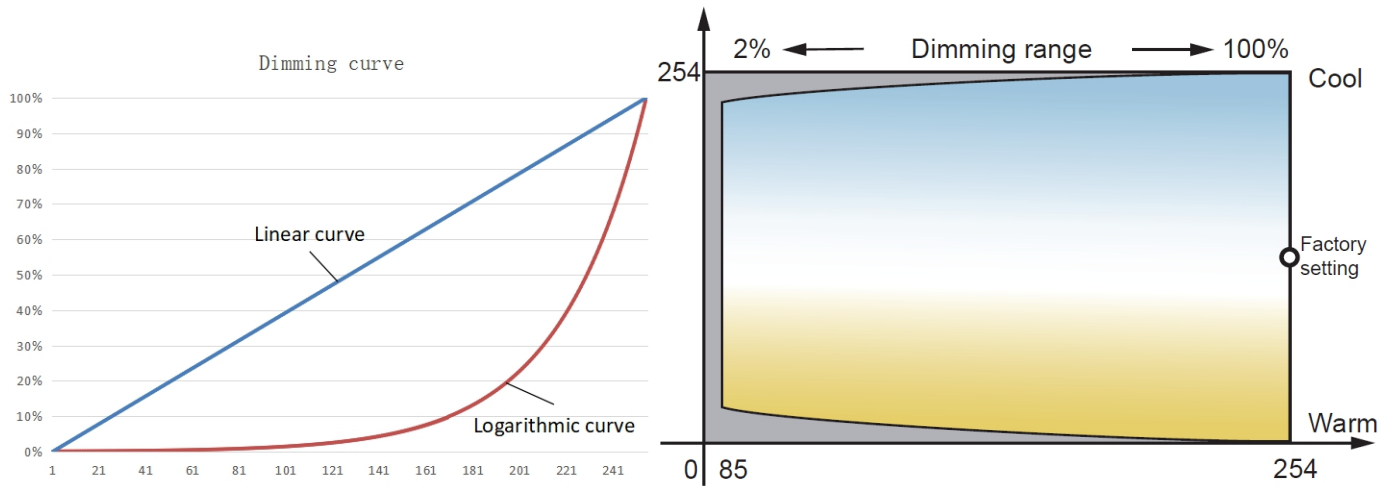

6. Current gear setting:

Current(mA)	DIP				Pomax (W)	Uout (V)
	1	2	3	4		
700	-	-	-	-	37.1	12~ 53
750	ON	-	-	-	40.0	12~ 53
800	-	ON	-	-	42.4	12~ 53
850	-	-	ON	-	45.0	12~ 53
900	-	-	-	ON	47.7	12~ 53
950	ON	-	-	ON	49.4	12~ 52
1000	ON	ON	ON	-	50.0	12~ 50
1050	ON	ON	-	ON	49.3	12~ 47
1100	ON	-	ON	ON	49.5	12~ 45
1150	-	ON	ON	ON	49.4	12~ 43
1200	ON	ON	ON	ON	49.2	12~ 41

8. ON/OFF & Description of Dimming Operation

- A. Short press the PUSH switch (short press time 0.1S-1S), the LED driver will turn on or off.
- B. Dimming: Press and hold the PUSH switch (1S-8S), the LED driver can achieve dimming, brightening or dimming, the dimming range is 2-100%.
- C. Memory: PUSH dimming has dimming memory function.
- D. Dimming synchronization: The power connected to the same PUSH switch can be synchronized by pressing and holding the PUSH switch for longer than 15S
- E. DALI dimming mode: Connect the power supply to the DALI system, and it can be dimmed by the DALI host. The dimming range is 0-100%.

9. matters needing Attention

- 1) The LED string must be connected to the load before turning on the input power, otherwise the LED string may be damaged.